

The best of two worlds in a single mooring line: Highly elastic polyamide core protected by a robust polyester cover.



## **Excellent shock absorption**

Braided polyamide core with high elongation for comfortable mooring.




## **Permanently flexible**

Best handling due to braided cover made of non-hardening, abrasion-resistant polyester.



## **High performance**

The perfect interplay of the various raw materials is reflected in the high strength.

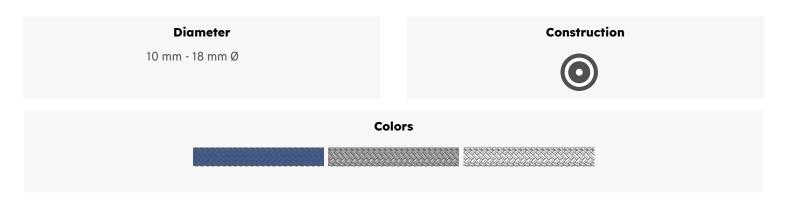

## Technical data

Elongation at 10% of the breaking load: 2.60 %

Ø [mm]	Weight [kg/100 m]	BI. real in splice [kN]	BI. linear DIN according to EN ISO 2307 [kN]
10 mm Ø	6.20	26.00	28.90
12 mm Ø	8.80	38.00	42.20
14 mm Ø	12.00	51.00	56.70
16 mm Ø	15.80	67.00	74.40
18 mm Ø	19.80	84.00	93.30



More than Ropes.